

PEFS Series Firefighter Safety Switch



PROJOY
electric
— Switch To Safety! —



ENERGYNAT | Autoryzowany Dystrybutor



Duże RABATY na MEGAWATY

Szukasz niezawodnych komponentów PV w najlepszej cenie? Skorzystaj z oferty: Duże RABATY na MEGAWATY w Energynat, bo im więcej kupujesz, tym więcej zyskujesz.

Masz pytanie? Zadzwoń: 22 245 40 64
lub napisz: wsparcie@energynat.pl

Sprządź aktualne PROMOCJE PV na
www.energynat.trade



Dowiedz się więcej o przeciwpożarowych wyłącznikach bezpieczeństwa z serii PEFS

High Craftsmanship AND High Standards



Small volume



Flame retardant material



Anti-UV



Outdoor installation IP66



Easy to install



Service life 25 years



High reliability




OV output physical isolation



Multiple shutdown methods over temperature/loss of pressure /emergency shutdown



Select Code

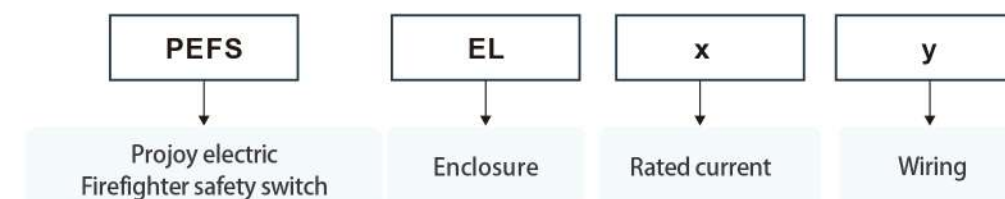

Models: PEFS-ELx-y. Rated current: x=16/25/32/40/55/40H/50H, Wiring types: y=2/2H/4S/4T/4B/4



Unit with knock outs, M12



Unit with cable glands, M12




Unit with MC4 connectors

When the current is greater than 40A, please select cable glands or knockouts.



Diagram

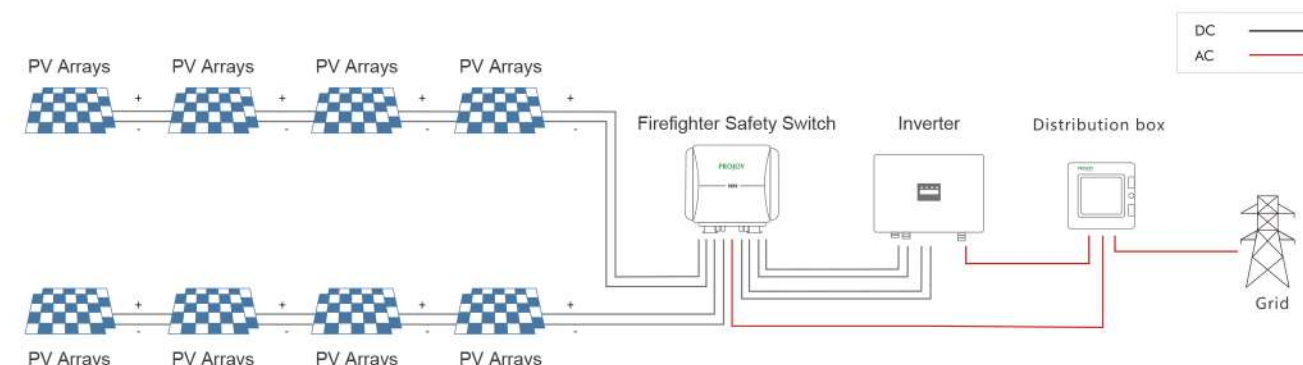






Technical data

Technical Parameter	
Main Parameters	PEFS
String voltages (Vdc)	300~1500
String current (A)	9~55
Number of strings	1/2
Switch wiring	2/2H/4S/4T/4B/4
Operating voltage	100Vac - 270Vac
Nominal voltage	230Vac
Nominal current	30mA
Start up (loading) current	average 100mA
Switch on action current	max 300mA
Feedback contact	24Vdc - 300mA max
Operating temperature range	-20° C - +50° C
Max. operating temperature before automatic switch off	+70° C
Storage temperature range	-40° C - +85° C
Protection degree	IP66
Protection level	Class II
Certification	CE
DC Switch disconnect according to	EN 60947-1&3
Number of operations	10000
Number of operations under load (PV1)	>1500

Technical data

Data of PEFS refer to built-in DC isolators. Data according to IEC60947-3(ed.3.2):2015, UL508i. Utilization category DC-PV1.								Poles	No. of Strings	Part Number
300V	600V	700V	800V	900V	1000V	1200V	1500V			
16	16	16	16	13	9	6	3	2/4	1/2	PEFS-EL16-2/4
25	25	23	22	16	11	8	4	2/4	1/2	PEFS-EL25-2/4
32	32	27	26	20	13	10	5	2/4	1/2	PEFS-EL32-2/4
40	40	35	30	25	20	10	6	2/4	1/2	PEFS-EL40-2/4
55	55	55	45	35	25	15	8	2/4	1/2	PEFS-EL55-2/4
16	16	16	16	16	16	16	16	4	1	PEFS-EL16-4S/4T/4B
25	25	25	25	25	25	25	20	4	1	PEFS-EL25-4S/4T/4B
32	32	32	32	32	32	32	23	4	1	PEFS-EL32-4S/4T/4B
40	40	40	40	40	40	40	30	4	1	PEFS-EL40-4S/4T/4B
55	55	55	55	55	55	55	40	4	1	PEFS-EL55-4S/4T/4B
50	50	50	50	50	50	40	30	2/4	1/2	PEFS-EL50H-2/4
40	40	40	40	40	40	30	20	2/4	1/2	PEFS-EL40H-2/4
50	50	50	50	50	50	50	50	4	1	PEFS-EL50H-4S/4B/4T
40	40	40	40	40	40	40	40	4	1	PEFS-EL40H-4S/4B/4T

Contact Configuration

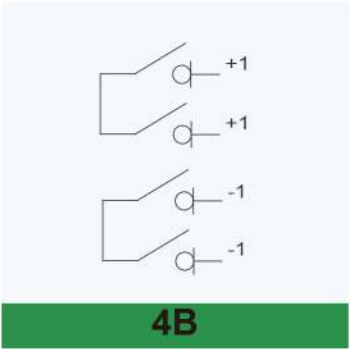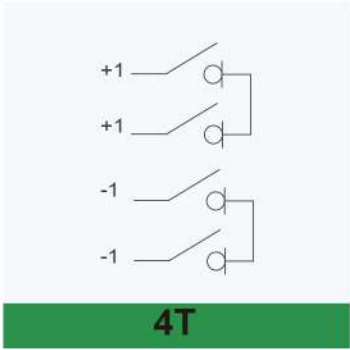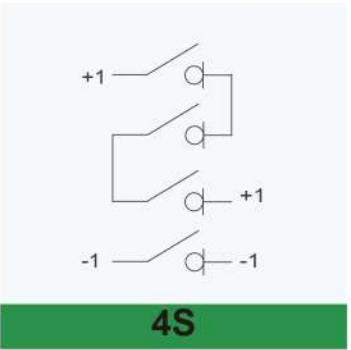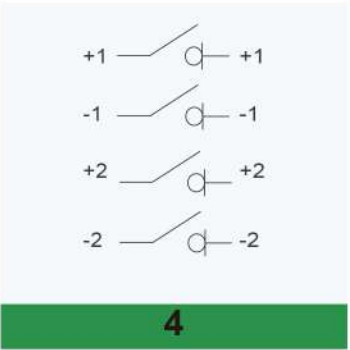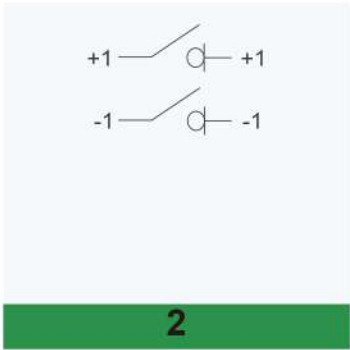


Dimensions of PEFS

PEFS Series

Dimensions

Unit: mm

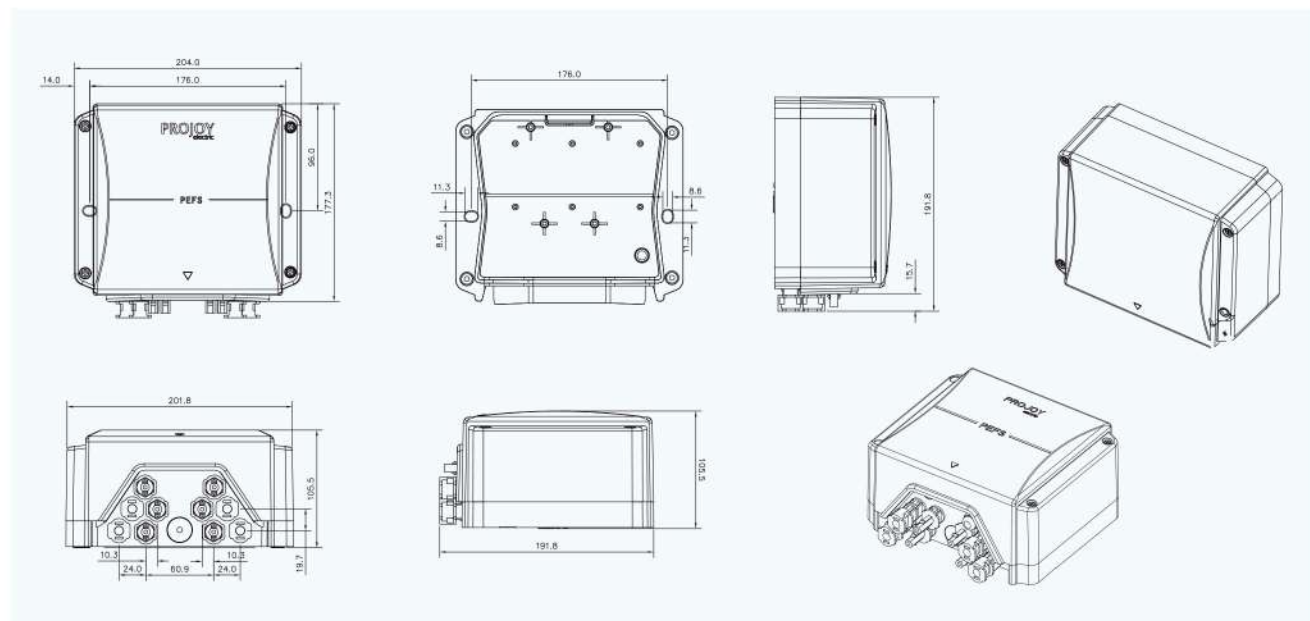


Dimensions of PEFS

PEFS Series

Dimensions

Unit: mm

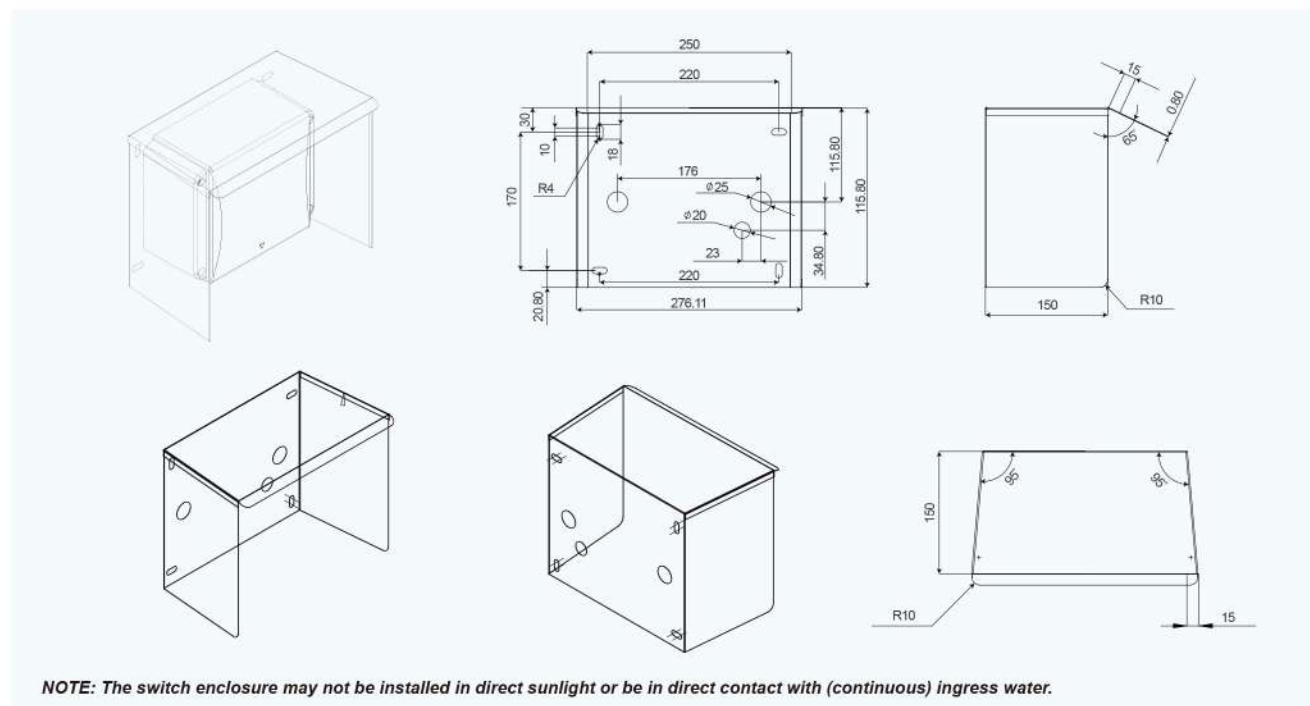

PROJOY electric
Switch To Safety!

ProJoy Electric Co., Ltd.

2nd Floor, Building 3, No. 2266, Taiyang Road, Xiangcheng District, Suzhou, China
Tel: +86 512 6878 6489 | Fax: +86 512 6878 6489
Email: sales@projoy-electric.com | www.projoy-electric.com